WATER LINE REPLACEMENT IN BRIAR COURT AREA
WBS NO. S-000035-0228-4
DEPARTMENT OF PUBLIC WORKS AND ENGINEERING
ENGINEERING AND CONSTRUCTION DIVISION

KEY MAP: 489 M,R,V 490J
DISTRICT G

N

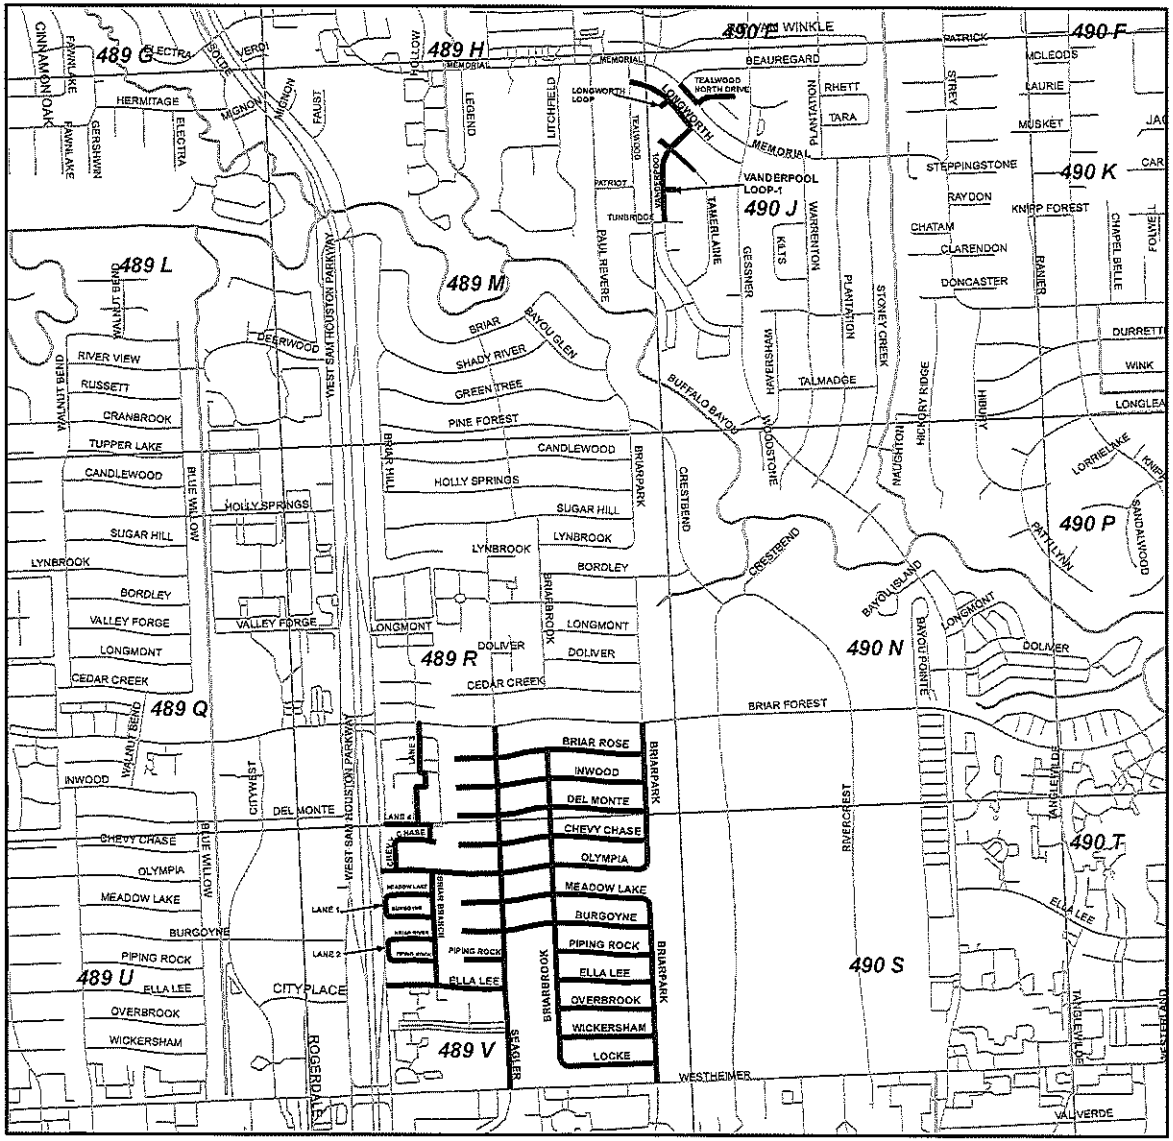

STREET	START STREET	END STREET	SIZE (INCH)	LENGTH (FEET)	COUNCIL DISTRICT
Tealwood North Drive	Memorial	END (east)	6	465	G
Memorial	Beauregard	Tealwood North Drive	8	230	G
Longworth	Tealwood	Vanderpool	8	710	G
Longworth Loop	Longworth	Longworth	6	420	G
Vanderpool	Longworth	Tunbridge Lane	8	965	G
Tamerlaine	END (north)	COH Limit	6	635	G
Vanderpool Loop-1	Vanderpool	Vanderpool	8	455	G
Briar Rose	END (west)	Seagler	8	776	G
Briar Rose	Seagler	Briarbrook	12	690	G
Briar Rose	Briarbrook	Briarpark	8	1,094	G
Inwood	END (west)	Briarpark	8	2,540	G
Del Monte	END (west)	Briarpark	8	2,615	G
Chevy Chase	Olympia	END (east)	8	770	G
Chevy Chase	END (west)	Briarpark	8	2,630	G
Olympia	West Sam Houston Parkway	Briarpark	8	2,780	G
Meadow Lake	Lane-1	Briar Branch	8	510	G
Meadow Lake	END (west)	Seagler	8	670	G
Meadow Lake	Seagler	Briarpark	12	1,982	G
Lane-1	Meadow Lake	Burgoyne	8	235	G
Burgoyne	Lane-1	Briar Branch	8	490	G
Burgoyne	END (west)	Briarpark	8	2,225	G
Briar River	Lane-2	Briar Branch	8	500	G
Lane-2	Briar River	Piping Rock	8	200	G
Piping Rock	Lane-2	Briar Branch	8	480	G
Piping Rock	END (west)	Seagler	6	576	G
Piping Rock	Briarbrook	Briarpark	8	1,050	G
Ella Lee	West Sam Houston Parkway	Seagler	8	1,350	G
Ella Lee	Briarbrook	Briarpark	8	1,055	G
Overbrook	Briarbrook	Briarpark	8	1,045	G
Wickersham	Briarbrook	Briarpark	8	1,045	G
Locke	Briarbrook	Briarpark	8	980	G
Lane-3	Briar Forest	Chevy Chase	8	1,320	G
Lane-4	END (west)	Olympia	8	645	G
Briar Branch	Olympia	Ella Lee	8	1,184	G
Seagler	Briar Forest	Briar Rose	12	375	G
Seagler	Briar Rose	Meadow Lake	8	1,345	G
Seagler	Meadow Lake	Westheimer	12	2,115	G
Briarbrook	Briar Rose	Meadow Lake	12	1,642	G
Briarbrook	Meadow Lake	Locke	8	1,800	G
Briarpark	Briar Forest	Olympia	8	1,500	G
Briarpark	Meadow Lake	Westheimer	12	2,000	G
			TOTAL	46,094	

CITY OF HOUSTON
DEPARTMENT OF PUBLIC WORKS AND ENGINEERING

WATER LINE REPLACEMENT IN BRIAR COURT AREA
WBS NO. S-000035-0228-4

POST TRC PROJECT VICINITY MAP

SCALE: NTS | DATE: 04/25/2017

CHARLES D. GOODEN CONSULTING ENGINEERS, INC.
2320 HOLMES RD, STE A
HOUSTON, TX 77051
TEL: (713) 660-6905 | FAX (713) 660-8817
TBPE FIRM REGISTRATION 4176